


# STT 40 TRANSFER TRAILER

**SPARTAN**  
Quality, Engineering, Value

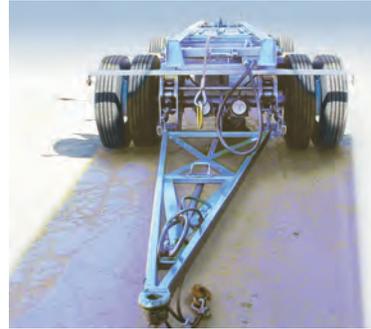

Spartan Truck Company has been a leader in the manufacturing of Roll-Off trucks and trailers for the past 30 years. We are proud of our quick order lead times, one of the best in the industry. We are known for our high quality components and extremely durable, low maintenance roll-off systems and trailers.


#### Significant Features

- High strength steel rail tubes and high strength steel alloy rollers
- Lightweight design
- LED lights standard
- 2-cylinder Reeving system
- Spare tire rack



12266 Branford Street  
Sun Valley, CA 91352  
Phone (818) 899-1111  
Fax (818) 897-4366  
email [sales@spartantruck.com](mailto:sales@spartantruck.com)  
website [www.spartantruck.com](http://www.spartantruck.com)



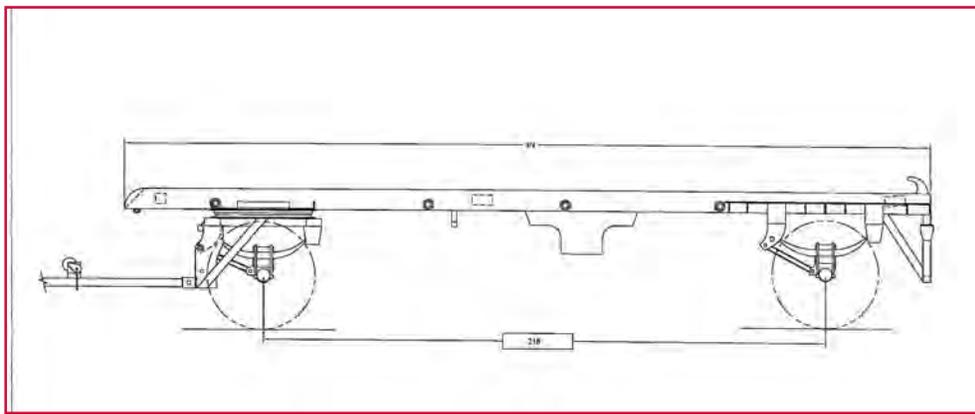

## Features

Chassis Frame	Unibody frame 8" x 4" x .375 (ASTM A-500/Grade C) steel tubing, 34.5" x 26'
Outside Frame	34.5" (optional 35.5")
Container Size	24' container
Weight	7,500 lbs. (approximate weight not including options)
Payload	32,500 lbs. (based on tare weight minus 40,000 GVWR, laws vary by state)
Outside Rollers	Side rollers 3 per side (4" OD x 2" ID) equipped with bronze bushings
LED Lights	Full LED lights
Adjustable Bin Stops	Moveable nose roller stops
Rub Rails	3/8" x 3" roller guides (front of trailer)
Lubrication	High quality zerks fittings - all wear points
Tie Downs	(4) dual ratchet tie downs with 4" straps
Turn Table/Tongue	Turntable tongue hitch, 2.5" steel square tubing "A" frame type, 5/8" safety steel cable, brake release switch and manual winch for coupling
Wiring	Plug and play electrical wiring
Suspension	Leaf springs front and rear suspension, 22,500 lb. minimum rating
Axles	5" round beam axle, 25,00 lb. minimum rating
Paint	Gray primer base coating, gloss black enamel finish
Hub Wheels	Outboard (metric) type 10 hole, 11 1/4" diameter bolt
Brakes	16.5" x 7" AIE, "S" cam with automatic slack adjuster. ABS braking system.
Wheels and Tires	Dual front and rear wheels: low profile 295/75R 22.5 on steel rims
Mud Guards	Front and rear mud guards installed on cross bar and rear bumper
Tongue Hoist	Air operated hoist
Bumper	Rear bumper with ICC navigation lighting DOT approved, brackets for mud flaps and container guiding brackets

## Options

Reeving System	Single cylinder reeving system and cable
Tool Box	18" x 36" heavy duty 9 guage steel tool box with rear tarp storage
Aluminum Rims	Polished aluminum rims outside, machined inside, with hub and lug nut covers (In total, approximately 200 lbs lighter than steel)
Aluminum Rims	Machined aluminum rims, with or without hub and lug nut covers (In total, approximately 200 lbs lighter than steel)